


'Y' TYPE STRAINER

Applications:

Kerr Valve strainers are suitable for use in a variety of fluid systems such as air, chemical, gas, oil or water lines etc. for the protection of valves, pumps, compressors and other equipment.

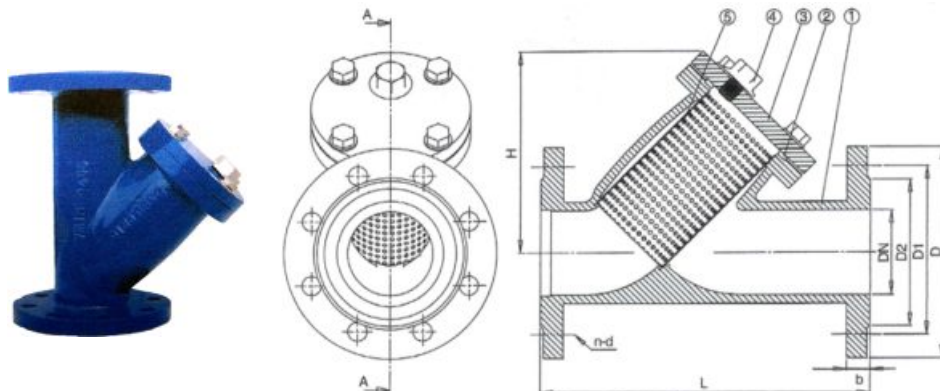

BASIC DESIGN STANDARDS			
Face To Face	DIN3202		
Flanges	DIN2533 PN16		
Testing	DIN3230		
PRESSURE TEST			
DN	Pressure	Hydro-Test	
	Rating	Pressure(Mpa)	
	(PN)	Body	Seat
15-500	10	1.5	1.1
15-400	16	2.4	1.76

DIMENSIONS (mm)								
Size(DN)	L	D	D1	D2	b	n-d	H	WT(kg)
15	130	95	65	45	14	4-14	65	1.7
20	150	105	75	58	16	4-14	70	2.3
25	160	115	85	68	16	4-14	80	3.2
32	180	140	100	78	18	4-18	90	5
40	200	150	110	88	18	4-18	135	6.5
50	230	165	125	102	20	4-18	150	8.7
65	290	185	145	122	20	4-18	160	12
80	310	200	160	138	22	8-18	200	19
100	350	220	180	158	24	8-18	240	27
125	400	250	210	188	26	8-18	290	40
150	480	285	240	212	26	8-22	330	58
200	600	340	295	268	30	12-22	380	86
250	730	405	355	320	32	12-26	480	127
300	850	460	410	378	32	12-26	550	200
350	980	520	470	438	36	16-26	680	290
400	1100	580	525	490	38	16-30	780	385
450	1200	640	585	548	40	20-30	830	520
500	1250	715	650	610	42	20-33	910	780